

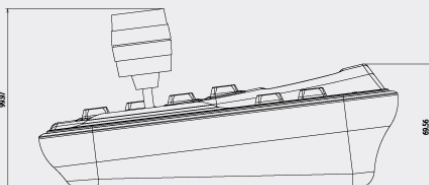
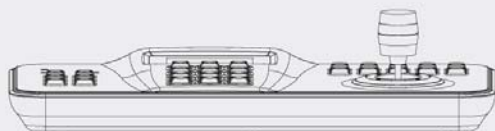


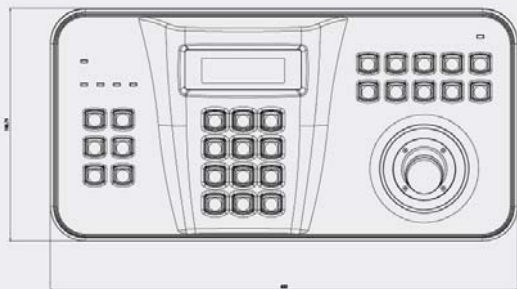

Features

- Control Keyboard, LCD Display and Joystick (3-Axis)
- LCD Display (20×4 Character)
- Recalls up to 256 Cameras
- Multiple Protocol Supported in Each Channel
- RS-485 Communications
(Remote control up to 1.2Km)
- Support to use up to 5 Slave Controller
- Supports USB port

SPECIFICATIONS

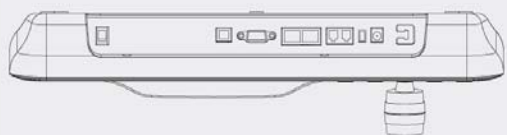

SPECIFICATIONS

| Model | SC3000 |
|-----------------------|---|
| Communication Type | Pan/Tilt interface:RS-485 (Remote control up to 1.2Km) |
| | DVR Interface: RS-485, USB |
| | Protocol: Pelco D, Pelco P |
| LCD Display | 20 × 4 Character LCD |
| PTZ Control | Joystick (3 Axis Twist Zoom) |
| Sub Keyboard | Max.5 Devices (Including Master Keyboard) |
| RS-485 Specification | Type: Asynchronous Serial, 1 Start Bit, No Parity, 1 Stop Bit |
| | Transmission Type: Half Duplex |
| | Data Rate: 2400~38400 bps |
| Operation Voltage | 12VDC/9V Battery |
| Power Consumption | 120 ~ 150mA |
| Operating Temperature | - 10 ℃ ~ 50℃ / 60% |
| Dimensions | 400(W) × 200(H) × 150(D) mm |
| Weight | About 1.24Kg (Excluding Adaptor) |